



T6 LED Tubes (subst. T5) - 48"

T6 LED Tube is dedicated to achieve end-user friendly performance. We keep working on the goals of super durability, highest lumen output, lowest consumption, top security structural design under this theory and our constant effort.

CHARACTERISTICS

- High heat conduction 6063 aviation aluminum is used, with good heat dissipation.
- PC cover is imported high light transmittance, V0 fireproof, Anti-UV and not easy to change color, with good luminance uniformity.
- Bran big size chip. Low current to use with less heat to make the tube light more stable and long lifespan.
- Whole light is with 5 years warranty.
- Directly install in T5 holder. Perfect to replace the traditional T5 tube light.



Lumens
2800lm




Voltage
AC100-277V




Lifetime
50,000hrs

Connection

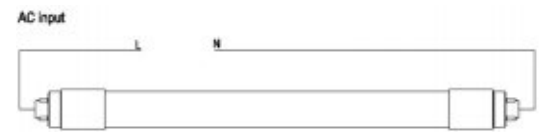

Color Temperature

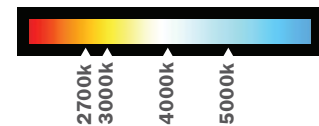

Technical Parameters

Product Code	CCT	Input Voltage	Power Factor	Lens Angle	CRI	Life Span	Operating Temperature	Operating Humidity	Efficiency	Warranty	Certificates
ZL18WT612M30K	3000K	100-277V	>0.9	120°	Ra≥80	50000 hours	-20°C~+45°C	<-80%	>90%	5 years	CE-RoHS
ZL18WT612M40K	4000K	100-277V	>0.9	120°	Ra≥80	50000 hours	-20°C~+45°C	<-80%	>90%	5 years	UL-RoHS
ZL18WT612M50K	5000K	100-277V	>0.9	120°	Ra≥80	50000 hours	-20°C~+45°C	<-80%	>90%	5 years	UL-RoHS